

			u	a	g	y
EEA21	2x20W	1h - 12V 7A	215	190	90	300
EEB23	2x20W	3h - 2x12V 7A	300	235	90	350
EEB51	2x50W	1h - 2x12V 7A	300	235	90	350
EEC53	2x50W	3h - 4x12V 7A	300	235	140	350

### AC L DURUM AYDINLATMA ARMATÜRÜ


- \* Metal gövde, metal çerçeveli projektör
- \* Acil durumda yüksek ışık gücü
- \* Sıva üstü kolay montaj
- \* Bakım boyunca ampul arızasına karşı koruma
- \* TS 8710 EN60598-2-22 standartlarına uygun
- \* IP40 koruma sınıfı

- \* ebeke gerilimi : 220-240V
- \* ebeke frekansı : 50 .. 60Hz
- \* Ortam sıcaklığı ta : 0° - 30°C
- \* Max. gövde sıcaklığı tc : 40°C
- \* arj süresi : 24 saat
- \* arj göstergesi : kırmızı LED
- \* Test butonu

### EMERGENCY LIGHTING FIXTURE

- \* Case sheet steal and floodlight
- \* Constant light output in emergency operation
- \* Surface mounted easy montage
- \* Protection device in case of missing lamp during maintenance
- \* According to TS 8710 EN60598-2-22
- \* Protection rating IP40

- \* Rated mains voltage : 220-240V
- \* Mains frequency : 50 .. 60Hz
- \* Ambient temperature ta : 0° - 30°C
- \* Max. case temperature tc : 40°C
- \* Recharge in 24hours
- \* Charging monitor : red LED
- \* Test button

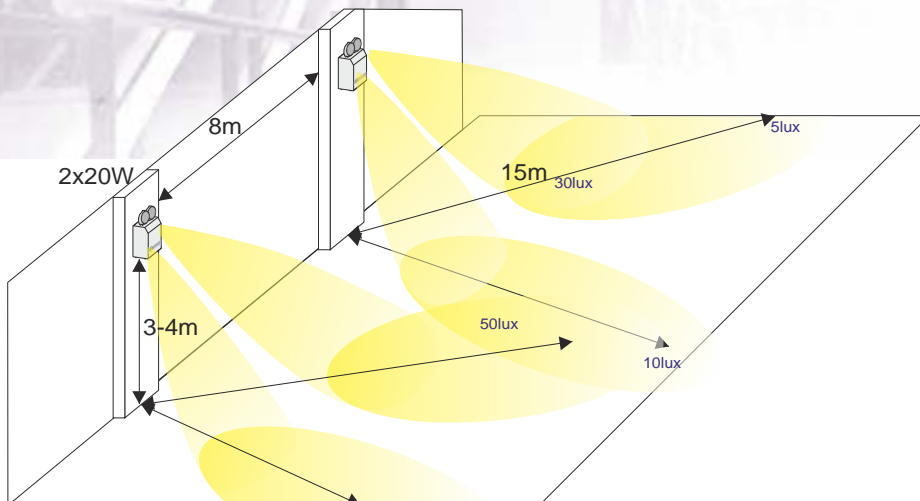

\* 2x20W - 320m<sup>2</sup> de min. 0.2lux

